
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

sources	ELEGATED REGUL	.ATION (EU) 2019/2	015 with regard to ener	gy labelling of light		
Supplier's name or trade mark: ULTRALUX						
Supplier's address: Boriana Ltd, Treti Mart 12, 5370 Dryanovo Gabrovo, BG						
Model identifier: SPL3B72RC-PCB						
Type of light so	urce:					
Lighting technology used:		LED	Non-directional or directional:	DLS		
Light source cap-type		Type Y				
(or other electric interface)						
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:		Yes	Envelope:	-		
High luminance light source:		No				
Anti-glare shield:		No	Dimmable:	Yes		
Product parameters						
Parameter		Value	Parameter	Value		
		General product p				
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		64	Energy efficiency class	D		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		8 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	30006500		
On-mode power (P <sub>on</sub> ), expressed in W		64,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimensions without separate control gear, lighting control	Height Width Depth	480 480 85	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page		

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordinates (x and y)	0,379 0,376			
Parameters for directional light sources:						
Peak luminous intensity (cd)	2 300	Beam angle in degrees, or the range of beam angles that can be set	120			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	5	Survival factor	1,00			
the lumen maintenance factor	0,96					

(a)'-': not applicable; (b)'-': not applicable;

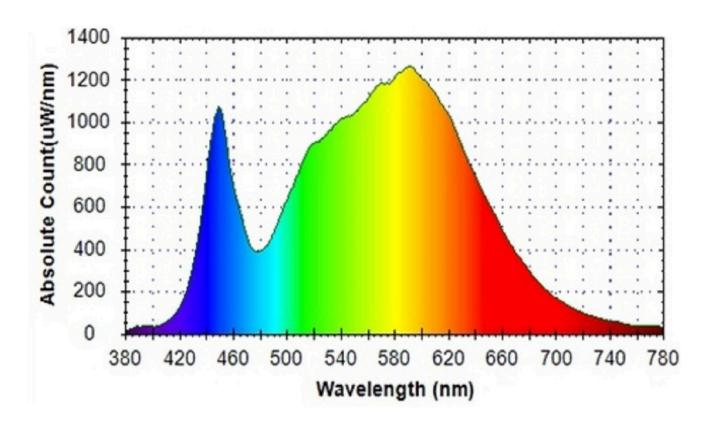

Model placed on the Union market.



**EPREL registration number:** 1984247 https://eprel.ec.europa.eu/qr/19

84247

Supplier: BORIANA LTD Website: ULTRALUX.BG

**Customer care service:** 

Name: Boriana Ltd Website: ultralux.bg

Email: sales@ultralux.bg Phone: +35967674433

Address: Treti Mart 12 5370 Dryanovo

Bulgaria